

LED DOWNLIGHT ANLUX

LEDIGAMI LED DOWNLIGHT ANLUX comes with a flexible structural design, with the availabilities of 2 versions; Fixed Type and Adjustable Wallwasher Type, enable customers to choose the lighting with their preference.

ANLUX fixed type can be used as a spot light and it can reach an optimal light distribution when installed at a 60-90cm distance from the wall. ANLUX adjustable wallwasher version is designed to spread out evenly and smoothly down the wall with high lumen output, creating the perfect glare-less lighting effect. It provides high efficiency optics and light pattern that is suitable in any installation.

SPECIFICATIONS

- System Power : 29W, 43W & 60W
- Version : Fixed Type & Adjustable Wallwasher Type
- Beam Angles* : 15°, 25° & 38° (for Fixed Type models only)
- CCT : 3000K, 4000K, 5700K
- CRI : 80
- Color Available : White
- IP rating : IP20

HIGHLIGHTS

- Easy Installation
- 80% energy saving compared to traditional light sources
- Average rated lifespan of 35,000 hours
- Environmental friendly - free of mercury and hazardous
- Instant-On Light

CERTIFICATIONS

- CE
- RoHS



Fixed Type



Adjustable Wallwasher Type


*Note:

LED Downlight Anlux Adjustable Wallwasher Type has no fixed beam angle


LED DOWNLIGHT ANLUX Technical Specifications

Illuminance and Field Angles :
Version : Fixed Type


Module Power	System Power Consumption	CCT	Beam Angles	Light Output	CRI	Power Factor	Version	Body Color	Article Number
26W	29 W	3000 K	15°	2500 lm	80	0.9	Fixed	White	T2-ANL-UW-21BX6T
26W	29 W	4000 K	15°	2500 lm	80	0.9	Fixed	White	T2-ANL-UW-21B06T
26W	29 W	5700 K	15°	2500 lm	80	0.9	Fixed	White	T2-ANL-UW-21BF6T
26W	29 W	3000 K	25°	2500 lm	80	0.9	Fixed	White	T2-ANL-VW-21BX6T
26W	29 W	4000 K	25°	2500 lm	80	0.9	Fixed	White	T2-ANL-VW-21B06T
26W	29 W	5700 K	25°	2500 lm	80	0.9	Fixed	White	T2-ANL-VW-21BF6T
26W	29 W	3000 K	38°	2500 lm	80	0.9	Fixed	White	T2-ANL-WW-21BX6T
26W	29 W	4000 K	38°	2500 lm	80	0.9	Fixed	White	T2-ANL-WW-21B06T
26W	29 W	5700 K	38°	2500 lm	80	0.9	Fixed	White	T2-ANL-WW-21BF6T
40W	43 W	3000 K	15°	3600 lm	80	0.9	Fixed	White	T2-ANL-UW-22BX6T
40W	43 W	4000 K	15°	3600 lm	80	0.9	Fixed	White	T2-ANL-UW-22B06T
40W	43 W	5700 K	15°	3600 lm	80	0.9	Fixed	White	T2-ANL-UW-22BF6T
40W	43 W	3000 K	25°	3600 lm	80	0.9	Fixed	White	T2-ANL-VW-22BX6T
40W	43 W	4000 K	25°	3600 lm	80	0.9	Fixed	White	T2-ANL-VW-22B06T
40W	43 W	5700 K	25°	3600 lm	80	0.9	Fixed	White	T2-ANL-VW-22BF6T
40W	43 W	3000 K	38°	3600 lm	80	0.9	Fixed	White	T2-ANL-WW-22BX6T
40W	43 W	4000 K	38°	3600 lm	80	0.9	Fixed	White	T2-ANL-WW-22B06T
40W	43 W	5700 K	38°	3600 lm	80	0.9	Fixed	White	T2-ANL-WW-22BF6T
57W	60 W	3000 K	15°	5300 lm	80	0.9	Fixed	White	T2-ANL-UW-23BX6T
57W	60 W	4000 K	15°	5300 lm	80	0.9	Fixed	White	T2-ANL-UW-23B06T
57W	60 W	5700 K	15°	5300 lm	80	0.9	Fixed	White	T2-ANL-UW-23BF6T
57W	60 W	3000 K	25°	5300 lm	80	0.9	Fixed	White	T2-ANL-VW-23BX6T
57W	60 W	4000 K	25°	5300 lm	80	0.9	Fixed	White	T2-ANL-VW-23B06T
57W	60 W	5700 K	25°	5300 lm	80	0.9	Fixed	White	T2-ANL-VW-23BF6T
57W	60 W	3000 K	38°	5300 lm	80	0.9	Fixed	White	T2-ANL-WW-23BX6T
57W	60 W	4000 K	38°	5300 lm	80	0.9	Fixed	White	T2-ANL-WW-23B06T
57W	60 W	5700 K	38°	5300 lm	80	0.9	Fixed	White	T2-ANL-WW-23BF6T



System Power: 29W

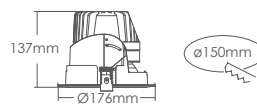

System Power: 43W

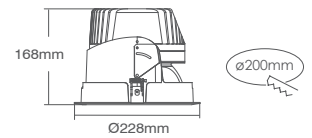

System Power: 60W




Tolerance: ±2.5mm

- Note:
1. LED is a dynamic and constantly evolving technology. The final lux output of LED Downlight Anlux may vary
 2. LED Downlight Anlux needs to connect with an external driver
 3. The total system power consumption is with 10% tolerance under 100-240V input voltage
 4. Operating temperature = Ta-20 + 40°C

LED DOWNLIGHT ANLUX Technical Specifications

Illuminance and Field Angles :
Version : Adjustable Wallwasher Type





Module Power	System Power Consumption	CCT	Light Output	CRI	Power Factor	Version	Body Color	Article Number
26W	29 W	3000 K	2200 lm	80	0.9	Adjustable Wallwasher	White	T2-ANL-9X-17BX6T
26W	29 W	4000 K	2200 lm	80	0.9	Adjustable Wallwasher	White	T2-ANL-9X-17B06T
26W	29 W	5700 K	2200 lm	80	0.9	Adjustable Wallwasher	White	T2-ANL-9X-17BF6T
40W	43 W	3000 K	3200 lm	80	0.9	Adjustable Wallwasher	White	T2-ANL-9X-18BX6T
40W	43 W	4000 K	3200 lm	80	0.9	Adjustable Wallwasher	White	T2-ANL-9X-18B06T
40W	43 W	5700 K	3200 lm	80	0.9	Adjustable Wallwasher	White	T2-ANL-9X-18BF6T
57W	60 W	3000 K	4700 lm	80	0.9	Adjustable Wallwasher	White	T2-ANL-9X-19BX6T
57W	60 W	4000 K	4700 lm	80	0.9	Adjustable Wallwasher	White	T2-ANL-9X-19B06T
57W	60 W	5700 K	4700 lm	80	0.9	Adjustable Wallwasher	White	T2-ANL-9X-19BF6T

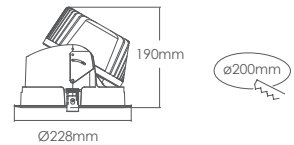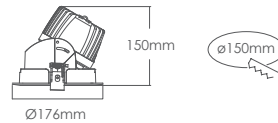

Tolerance: ±2.5mm

- Note:
1. LED is a dynamic and constantly evolving technology. The final lux output of LED Downlight Anlux may vary
 2. LED Downlight Anlux needs to connect with an external driver
 3. The total system power consumption is with 10% tolerance under 100-240V input voltage
 4. Operating temperature = Ta-20 → + 40°C
 5. LED Downlight Anlux Adjustable Wallwasher Type has no fixed beam angle

LED DOWNLIGHT ANLUX Radiation Pattern & Lux Diagram

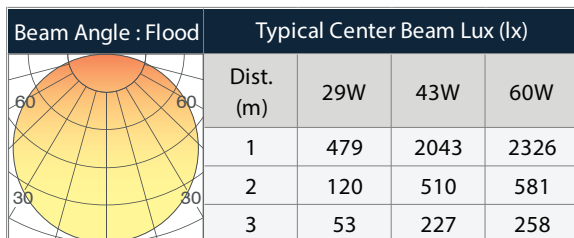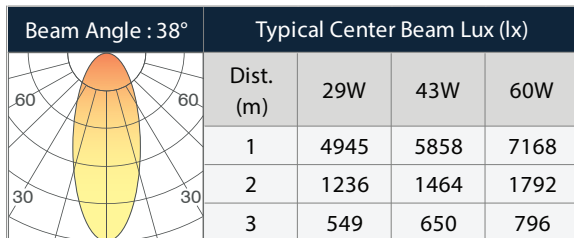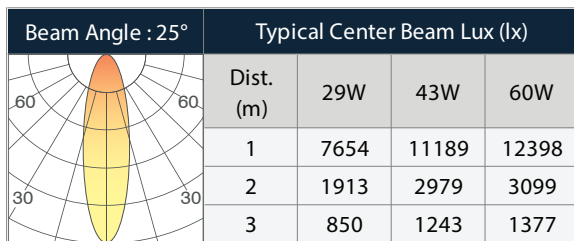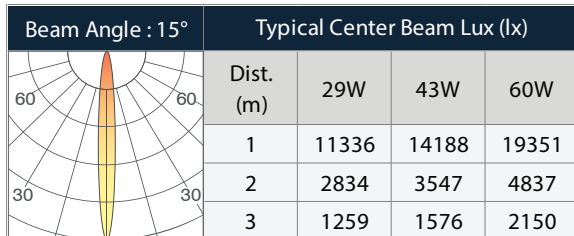

Note:

1. LED is a dynamic and constantly evolving technology. The final lux output of LED Downlight Anlux may vary
2. LED Downlight Anlux needs to connect with an external driver
3. The total system power consumption is with 10% tolerance under 100-240V input voltage
4. Operating temperature = Ta-20 → + 40°C
5. LED Downlight Anlux Adjustable Wallwasher Type has no fixed beam angle