

Features

- 6W, 12W & 24W LED Linear Light Lineon Pro
- RGB color with 120° beam angle
- DMX512 control system
- Length of 250mm, 500mm & 1000mm for selection

Highlights


- DMX controller to control lighting fixture and dimmers
- Delivers energy savings with durable quality
- Installed as recessed, surface-mounted, pendant luminaires and trunking system
- Field installation friendly and cost effective

Technical Specifications

| Article Number | | AC-AVB-LE-BANBFO | AC-ABB-LE-BANBFO | AC-ACB-LE-BANBFO |
|----------------|---------------------------|------------------|------------------|-------------------|
| Product | LED type | CREE SMD | CREE SMD | CREE SMD |
| | Beam angle | 120° | 120° | 120° |
| | Color | RGB | RGB | RGB |
| Environmental | Operating temperature | -35°C ~ 60°C | -35°C ~ 60°C | -35°C ~ 60°C |
| | Operating humidity range | 10% ~ 90%RH | 10% ~ 90%RH | 10% ~ 90%RH |
| | Ingress protection | IP67 | IP67 | IP67 |
| | LED lifetime | 50,000 Hours | 50,000 Hours | 50,000 Hours |
| Power | Mains input | 24VDC | 24VDC | 24VDC |
| | Power consumption maximum | 6W | 12W | 24W |
| Physical | Housing | Aluminum | Aluminum | Aluminum |
| | Dimensions (L x W x H) | 250 x 12 x 19 mm | 500 x 12 x 19 mm | 1000 x 12 x 19 mm |
| | Weight | 120gm | 240gm | 480gm |
| Control | System control | DMX512 | DMX512 | DMX512 |

Technical Drawing

Unit : mm

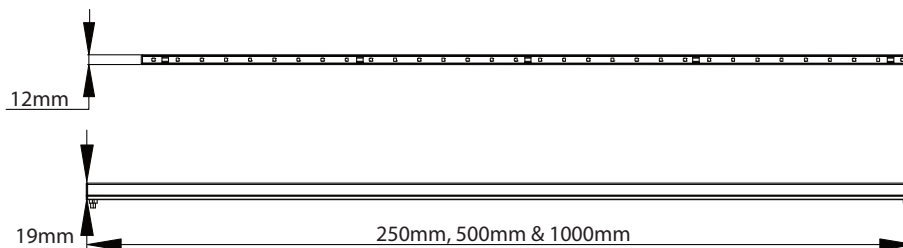

All specifications are subjected to change without notice.

Tolerance for dimensions = ± 2.5mm